


EN

SIEGER

**STARK FLAIL MOWERS
2024**



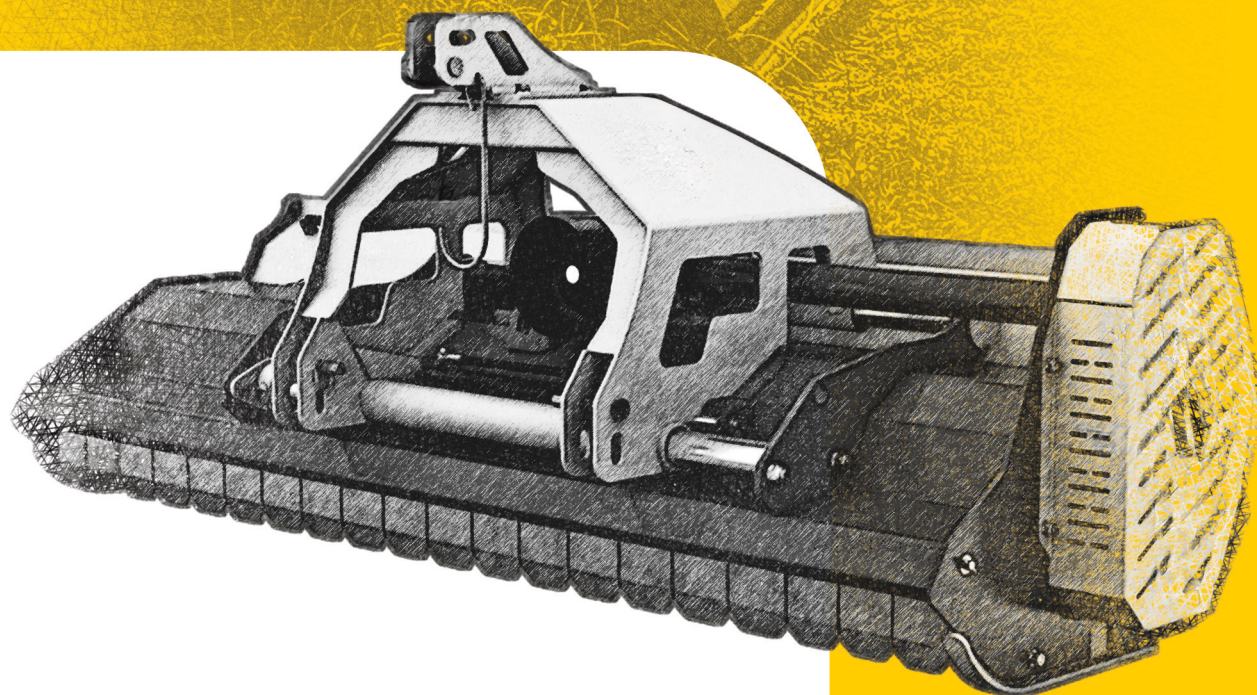

CONTENT

STARK FLAIL MOWERS


STARK KS PROFI	02
STARK KMH PROFI (F)	02
STARK KMH PROFI+	02
STARK KMH PROFI (DM)	03
STARK KDX PROFI	03
STARK KDX PROFI+	04
STARK KDX HEAVY DUTY	04
STARK CORN HEAVY DUTY	05
STARK KDS PROFI	05
STARK KDL PROFI	06
STARK KDL PROFI+	06

STARK KS PROFI

Width (m)	1,15	1,25	1,35
Minimum power requirement (kW)	11	13	15
Mounting	I		
RPM	540		
Roller diameter (mm)	76		
Number of hammers (pcs)	21	24	
Weight (kg)	181	188	195

Standard equipment:

- GTV 6x6 roller
- Adjustable working height: Rear roller with scraper
- Reducer with freewheeling clutch made of cast iron
- Adjustable tensioner
- Adjustable working height: Side skids
- Possibility of installing knives or hammers
- Timing belt
- Universal three-point hitch
- Reducer with reverse, 35kM

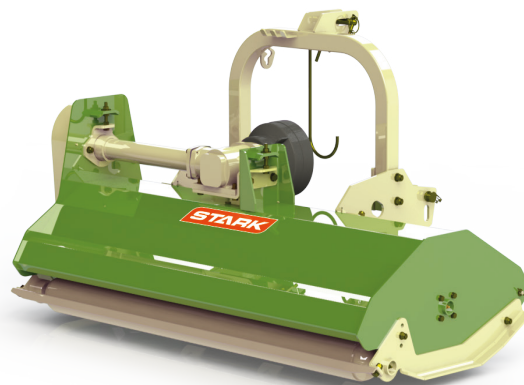

STARK KMH PROFI (F)



Width (m)	1,55	1,75
Minimum power requirement (kW)	19	27
Mounting	I/II	
RPM	540	
Roller diameter (mm)	108	
Number of hammers (pcs)	24	28
Distance from tractor axle (cm)	87<->100	86<->123
Weight (kg)	341	369

Standard equipment:

- Galvanized hammers
- GTV 6x6 shaft
- Reducer with freewheeling clutch made of cast iron
- Adjustable working height: Rear roller with scraper
- Adjustable working height: Side skids
- Reducer with reverse, 60kM

Accessories:

- Increase speed to 1000 rpm

STARK KMH PROFI+



Width (m)	1,55	1,75
Minimum power requirement (PS) (kW)	(26) 19	(36) 22
Mounting	I/II	
RPM	540	
Roller diameter (mm)	108	
Number of hammers (pcs)	24	28
Distance from tractor axle (cm)	870<-> 1029	870<->1227
Weight (kg)	381	403

Standard equipment:


- Drive belt
- Robust and multifunctional flap
- Double metal frame

STARK KMH PROFI (DM)

Width (m)	1,55/2,10	1,75/2,30
Minimum power requirement (PS) (kW)	26 (19)	36 (27)
Mounting	I/II	
RPM	540	
Shaft diameter (mm)	108	
Number of hammers (pcs)	24	28
Distance from tractor axle (mm)	870<->1029	871<->1227
Weight (kg)	492	522

Standard equipment:

- Inter-row disc for mulcher
- DM PROFI cutting disc with hydraulic sensor

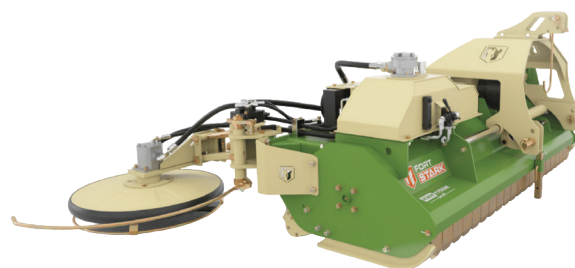

STARK KDX PROFI


Width (m)	2,0	2,2	2,4
Minimum power requirement (PS) (kW)	70 (52)	80 (60)	90 (67)
Mounting	II		
RPM	540		
Roller diameter (mm)	127		
Number of hammers (pcs)	28	32	34
Distance from tractor axle (cm)	99 <-> 136	109 <-> 146	119 <-> 156
Weight (kg)	593	620	648

Standard equipment:

- GTV 6 x 6 roller
- Cast iron gearbox with freewheel
- Adjustable height: rear roller with scraper
- Serrated knife
- Adjustable tensioner
- Adjustable height: side skids
- Universal 3-point hitch
- Reverse transmission with 60 horsepower

Accessories:

- Increase speed to 1000 rpm

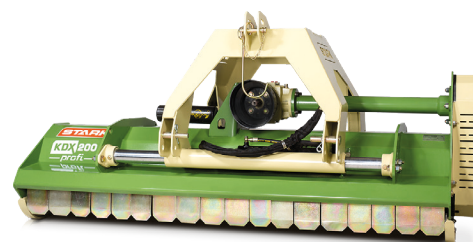

STARK KDX PROFI+

Width (m)	1,8	2,0	2,2	2,4
Minimum power requirement (PS) (kW)	60 (45)	70 (52)	80 (60)	90 (67)
Mounting	I/II			
RPM	540			
Roller diameter (mm)	127			
Number of hammers (pcs)	26	28	32	34
Maximum travel from the tractor axle (left) (mm)	941	925	1125	1225
Maximum travel from the tractor axle (right) (mm)	1172	1274	1474	1574
Weight (kg)	547	579	606	636



Standard equipment:


- Automatic belt tensioning
- Robust and multifunctional flap
- Double metal frame

Accessories:

- Increase speed to 1000 rpm

STARK KDX HEAVY DUTY

Width (m)	2,5	2,7
Power demand (PS) (kW)	90 (65)	110 (82)
Mounting	II/III	
RPM	540	
Power demand on the roller	65	
Bearing type	21311C	
Number of hammers (pcs)	28	30
Distance from tractor axle (cm) <-- A / B -->	1265<-->1735	1365<-->1835
Shaft diameter (mm)	203x12	
Number of belts	5	
Roller diameter with hammers (mm)	467	
Rear shaft diameter (mm)	195	
Shaft speed (rpm)	54/sec	
Weight (kg)	1220	1300

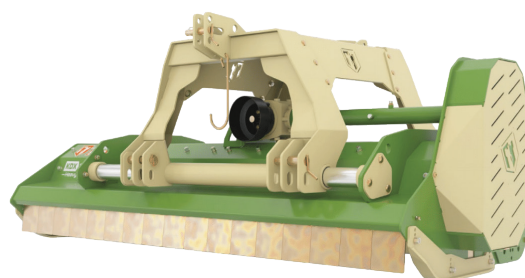

Standard equipment:

- Blade changing system
- Opposite knives
- Rear shaft
- Shaft with interchangeable tips

Accessories:

- Increase speed to 1000 rpm

STARK CORN HEAVY DUTY

Width (m)	2,6 RL	2,8, RL	2,6 TR	2,8 TR
Power demand (PS) (kW)	100 (75)	120 (90)	100 (75)	120 (90)
Mounting	II/III			
RPM	540			
Power demand on the roller	65			
Bearing type	UK211 + M2311			
Number of knives (pcs)	84	96	84	96
Roller diameter (mm)	203			
Number of belts	6			
Roller diameter with knives (mm)	603			
Rear roller diameter (mm)	220			
Shaft speed (rpm)	59/sec			
Weight (kg)	1317	1392	1317	1392



Standard equipment:

- Robust and multifunctional flap
- Shaft with interchangeable tips
- Shredding knives
- Double metal frame

Accessories:

- Increase speed to 1000 rpm

STARK KDS PROFI

Width (m)	1,25	1,45
Minimum power requirement (PS) (kW)	26 (19)	35 (26)
Mounting	II	
RPM	540	
Roller diameter (mm)	108	
Number of hammers (pcs)	20	24
Maximum travel from the tractor axle (left) (mm)	512	
Maximum travel from the tractor axle (right) (mm)	1758	1958
Folding angle	from -55° to 90°	
Weight (kg)	382	401




Standard equipment:

- Shock protection system
- Welded counter triple blade
- Clean, well-maintained operating areas

STARK KDL PROFİ

Width (m)	1,6	1,8	2,0	2,2
Minimum power requirement (PS) (kW)	70 (52)	80 (60)	90 (67)	100 (75)
Mounting	II/III			
RPM	540			
Roller diameter (mm)	127			
Number of hammers (pcs)	22	26	28	32
Maximum travel from the tractor axle (left) (mm)	780			
Maximum travel from the tractor axle (right) (mm)	1240	1440	1640	1840
Maximum travel from the tractor axle on the arm (mm)	2640	2840	3040	3240
Folding angle	from -60 to 90			
Weight (kg)	650	685	747	761

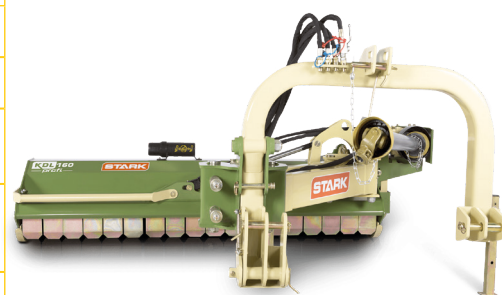


Standard equipment:

- GTV 6 × 6 roller
- Cast iron gearbox with freewheel
- Adjustable height: side skids
- Adjustable height: Rear roller
- Adjustable tensioner
- Knives or hammers can be mounted

STARK KDL PROFİ+

Width (m)	1,6	1,8	2,0	2,2
Minimum power requirement (PS) (kW)	70 (52)	80 (60)	90 (67)	100 (75)
Mounting	II/III			
RPM	540			
Roller diameter (mm)	127			
Number of hammers (pcs)	22	26	28	32
Maximum travel from the tractor axle (left) (mm)	379			
Maximum travel from the tractor axle (right) (mm)	2633	2833	3033	3233
Folding angle	from -45 to 90			
Weight (kg)	684	723	757	785

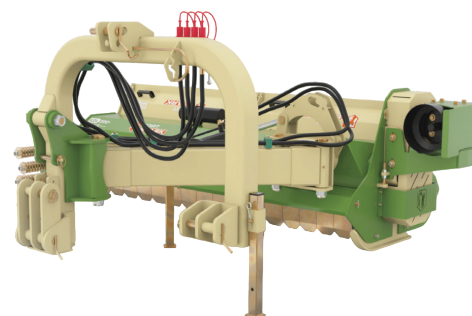

Standard equipment:

- Spring-loaded anti-collision safety system
- Robust and multifunctional flap
- Double metal frame

SIEGER

www.siegertech.de

