


EN

---

# SIEGER

GRAIN

CATALOGUE 2025

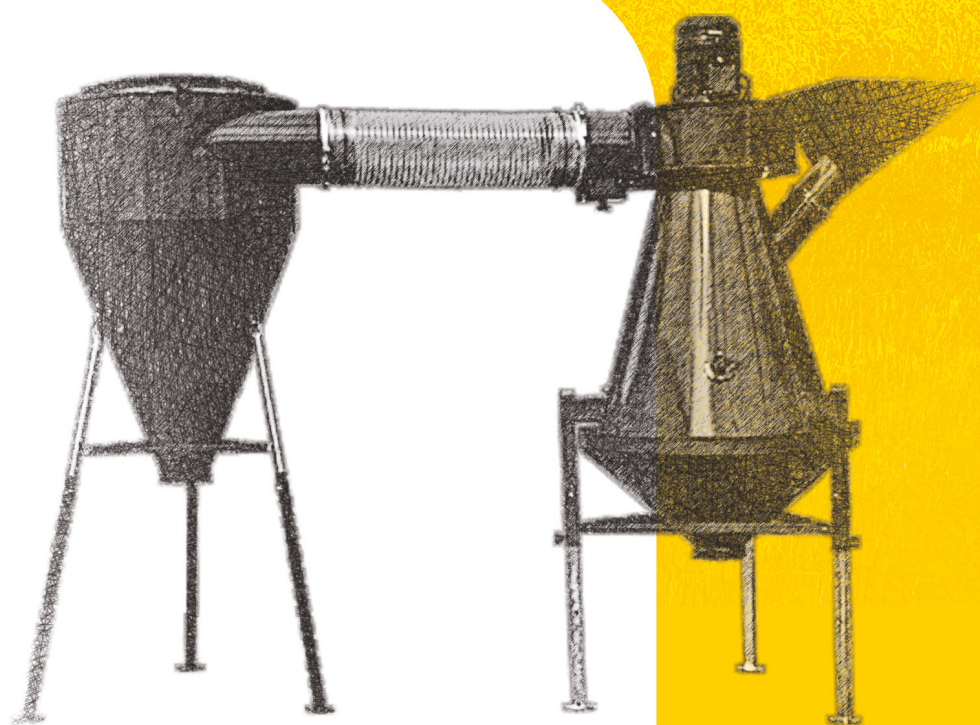



SIEGER



# TABLE OF CONTENTS

<b>PNEUMATIC SUCTION-PRESSURE CONVEYOR - SDG 480</b>	<b>04</b>
<b>PNEUMATIC SUCTION-PRESSURE CONVEYOR - SDG 470</b>	<b>05</b>
<b>PNEUMATIC SUCTION-PRESSURE CONVEYOR - SDG 449</b>	<b>06</b>
<b>PNEUMATIC SUCTION-PRESSURE CONVEYOR - SDG 449/1</b>	<b>06</b>
<b>PNEUMATIC SUCTION-PRESSURE CONVEYOR - SDG 450/1</b>	<b>07</b>
<b>PNEUMATIC SUCTION-PRESSURE CONVEYOR - SDG 449/2</b>	<b>08</b>
<b>PNEUMATIC SUCTION-PRESSURE CONVEYOR - SDG 450</b>	<b>09</b>
<b>SUCTION-PRESSURE CONVEYOR - SDG 207</b>	<b>10</b>
<b>SUCTION-PRESSURE CONVEYOR - SDG 207/1</b>	<b>10</b>
<b>SUCTION-PRESSURE CONVEYOR - SDG 207/2</b>	<b>10</b>
<b>SUCTION-PRESSURE CONVEYOR - SDG 207/3</b>	<b>10</b>
<b>PNEUMATIC CONVEYOR - DG 207</b>	<b>11</b>
<b>PNEUMATIC CONVEYOR - DG 207/1</b>	<b>11</b>
<b>PNEUMATIC CONVEYOR - DG 207/2</b>	<b>11</b>
<b>BEATER SHREDDER SG 115</b>	<b>12</b>
<b>SEPARATOR GR 502, GR 502/1, GR 502/2</b>	<b>13</b>
<b>SCREW CONVEYOR SE 206/2</b>	<b>14</b>
<b>SCREW CONVEYOR SE 206/3</b>	<b>14</b>
<b>SCREW CONVEYOR SE 206/4</b>	<b>14</b>
<b>SCREW CONVEYOR Ø 200MM SE 447/1,</b>	<b>15</b>
<b>SCREW CONVEYOR Ø 200MM SE 447/2</b>	<b>15</b>
<b>SCREW CONVEYOR Ø 200MM SE 447/3</b>	<b>15</b>
<b>SCREW CONVEYOR SH 206/5</b>	<b>16</b>
<b>SCREW CONVEYOR SH 458</b>	<b>16</b>
<b>SCREW CONVEYOR SH 461</b>	<b>16</b>
<b>SCREW CONVEYOR WITH HYDRAULIC DRIVE SH 213</b>	<b>17</b>
<b>SEED TREATER - 1 NOZZLE D1</b>	<b>18</b>

# PNEUMATIC SUCTION-PRESSURE CONVEYOR

SDG 480 WITH A FIVE-STAGE FAN

(WITH TRACTOR DRIVE)

Conveyor performance [t/h]	60
Maximum transport distance [m]	80
Pipe diameter [mm]	160
PTO speed [rpm]	1000
Power demand for PTO [kW]	min. 90



Powder  
coating

## STANDARD EQUIPMENT:

- Dust removal system
- Hydraulically foldable discharge
- Polyurethane flexible hose



# PNEUMATIC SUCTION-PRESSURE CONVEYOR

## SDG 470 WITH A FOUR-STAGE FAN

(WITH TRACTOR DRIVE)

Conveyor performance [t/h]	35
Maximum transport distance [m]	80
Pipe diameter [mm]	160
PTO speed [rpm]	1000
Power demand for PTO [kW]	min. 62



### STANDARD EQUIPMENT:

- Dust removal system
- Hydraulically foldable discharge
- Polyurethane flexible hose



Powder  
coating

# PNEUMATIC SUCTION-PRESSURE CONVEYOR

SDG 449, SDG 449/1 WITH A THREE-STAGE FAN

(WITH TRACTOR DRIVE)

Conveyor performance [t/h]	25
Maximum transport distance [m]	70
Pipe diameter [mm]	160
PTO speed [rpm]	540
Power demand for PTO [kW]	min. 45



SDG 449



SDG 449/1



Powder coating

## STANDARD EQUIPMENT:

- Dust removal system
- Hydraulically foldable discharge
- Polyurethane flexible hose

# PNEUMATIC SUCTION-PRESSURE CONVEYOR

**SDG 450/1 WITH A TWO-STAGE FAN**

(WITH TRACTOR DRIVE)

Conveyor performance [t/h]	18
Maximum transport distance [m]	70
PTO speed [rpm]	540
Power demand for PTO [kW]	min. 37



## STANDARD EQUIPMENT:

- Flexible polyurethane hose with suction nozzle + band
- 2 m pipe + band
- Knee 90° + band



Powder  
coating



# PNEUMATIC SUCTION-PRESSURE CONVEYOR

SDG 449/2 WITH A THREE-STAGE FAN

(WITH AN ELECTRIC DRIVE)

Conveyor performance [t/h]	up to 25
Maximum transport distance [m]	70
Engine power [kW]	37
Pipe diameter [mm]	160



Powder  
coating

## STANDARD EQUIPMENT:

- Flexible polyurethane hose with suction nozzle + band
- 2 m pipe + band
- Knee 90° + band

# PNEUMATIC SUCTION-PRESSURE CONVEYOR

**SDG 450, WITH A TWO-STAGE FAN**

(WITH AN ELECTRIC DRIVE)

Conveyor performance [t/h]	up to 18
Maximum transport distance [m]	70
Engine power [kW]	22
Pipe diameter [mm]	160



## STANDARD EQUIPMENT:

- Flexible polyurethane hose with suction nozzle + band
- 2 m pipe + band
- Knee 90° + band



Powder  
coating

# SUCTION-PRESSURE CONVEYOR

SDG 207, SDG 207/1, SDG 207/2, SDG 207/3 WITH SINGLE-STAGE FAN

(WITH AN ELECTRIC DRIVE)



SDG 207

Conveyor type	Engine power [kW]	Performance in t/h			
		L-10m/H-3m	L-20m/H-3m	L-30m/H-3m	L-40m/H-3m
SDG 207	7,5	4,5	3,5	2,5	2,5
SDG 207/1	11	9,5	8,7	8	7
SDG 207/2	15	14,5	13	12	11
SDG 207/3	7,5	6,5	6,25	5,5	4,5



SDG 207.1



SDG 207.2



SDG 207.3



Powder coating

## STANDARD EQUIPMENT:

- Flexible polyurethane hose with suction nozzle + band
- 2 m pipe + band
- Knee 90° + band



# PNEUMATIC CONVEYOR

DG 207, DG 207/1, DG 207/2, DG 207/3

(WITH AN ELECTRIC DRIVE)



DG 207

Conveyor type	Engine power [kW]	Performance in t/h			
		L-10m/H-3m	L-20m/H-3m	L-30m/H-3m	L-40m/H-3m
DG 207	7,5	8	5,5	4	3,6
DG 207/1	11	16	13,5	11	9,5
DG 207/2	15	19	17	15,5	14,5



DG 207/1



DG 207/2

STANDARD EQUIPMENT:

- 2 m pipe + band
- Knee 90° + band



# BEATER SHREDDER SG 115

Efficiency [kg/h]	900
Engine power [kW]	7,5
Hopper volume [L]	85
Mesh size in the sieve [mm]	5-8



Powder  
coating

# SEPARATOR

GR 502, GR 502/1, GR 502/2



GR 502

Separator type	Separator efficiency [t/h]	Engine power [kW]
GR 502	up to 15	3
GR 502/1	up to 30	7,5
GR 502/2	15	3 + 2,2



GR 502/1



GR 502/2

## ADDITIONAL EQUIPMENT:

- 2 m pipe separating the cleaning cyclone from the dust removal cyclone
- A set of legs for a dust collection cyclone





# SCREW CONVEYOR

SE 206/2, SE 206/3, SE 206/4

(WITH AN ELECTRIC DRIVE)



SE 206/2

Conveyor type	Conveyor performance [t/h]	Basic working length [mb]	Maximum lifting height of the conveyor 4 mb [m]	Maximum working angle	Inner diameter [mm]	Engine power [kW]
SE 206/2	16 - 24	4	1,7	60°	140	3
SE 206/3	4 - 9		1,7		100	1,5
SE 206/4	16 - 24		2,8		140	3



SE 206/3



SE 206/3



Powder coating

## ADDITIONAL EQUIPMENT:

- Hopper (SE 206/2, SE 206/3)
- Large trolley (SE 206/2, SE 206/3)
- Flexible discharge (SE 206/2, SE 206/3, SE 206/4)
- Rotary discharge (SE 206/2, SE 206/3, SE 206/4)

Extension segments


Diameter 100 mm (SE 206/3)

Diameter 140 mm (SE 206/2, SE 206/4)

With a length of 1 m or 2 m

# SCREW CONVEYOR Ø 200MM

SE 447/1, SE 447/2, SE 447/3

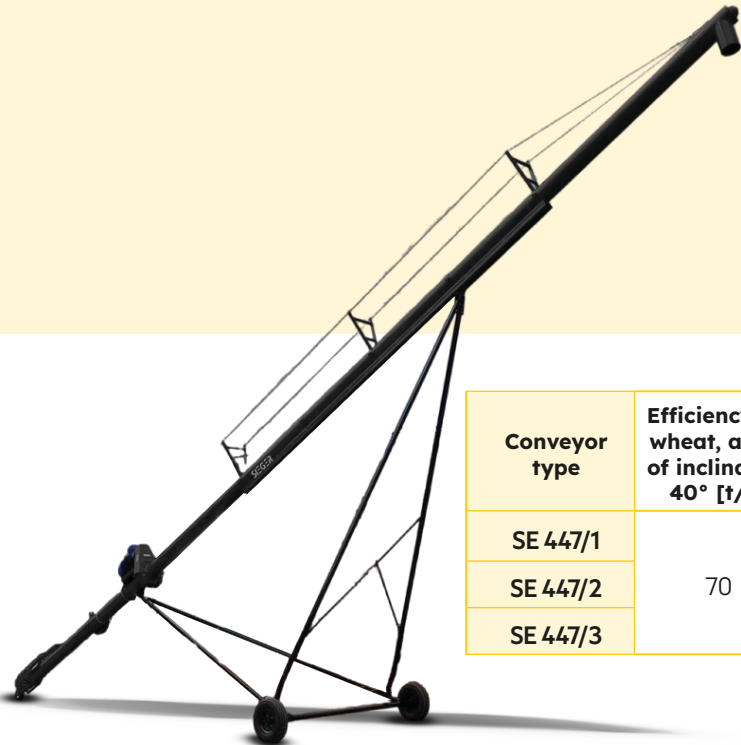

Conveyor type	Efficiency for wheat, angle of inclination 40° [t/h]	Working lenght [mb]	Inner diameter [mm]	Engine power [kW]
SE 447/1	70	8	200	7,5
SE 447/2		11		
SE 447/3		14		

SE 447/1



SE 447/2



SE 447/3

**ADDITIONAL EQUIPMENT:**

- Hopper
- Flexible discharge



Powder coating

# SCREW CONVEYOR

SH 206/5, SH 458, SH 461

Conveyor type	Conveyor performance [t/h]	Working length of the conveyor [mm]	Internal diameter of the conveyor [mm]	Tractor pump efficiency [l/min]
SH206/5 INOX	up to 25	3	140	20 - 40
SH206/5 GALVANIZED				
SH206/5 INOX				
SH206/5 GALVANIZED	48	4	200	
SH 458 INOX				
SH458 GALVANIZED				
SH 461		4,8		



SH 206/5



SH 458



SH 461



Powder coating

## ADDITIONAL EQUIPMENT:

- Flexible discharge FI 140mm GALVANIZED
- Flexible discharge FI 140mm INOX
- Flexible discharge FI 200mm



SCREW CONVEYOR WITH HYDRAULIC DRIVE  
SH 213

Conveyor performance [t/h]	Length of hydraulic lines [mb]	Working length of the conveyor [mm]	Overall length of the conveyor [mm]	Internal diameter of the pipe [mm]	Tractor pump efficiency [l/min]
150	1,8	5200	5800	325	70 - 100



Powder  
coating

## SEED TREATER - 1 NOZZLE D1




Powder  
coating

### STANDARD EQUIPMENT:

- Pressure regulator
- Weight 5 kg
- Easy and quick installation
- Efficiency up to 25 t/h (depending on the conveyor)
- Two filters that prevent external objects from entering the pump and prevent clogging of the spray nozzle

*SIEGER*

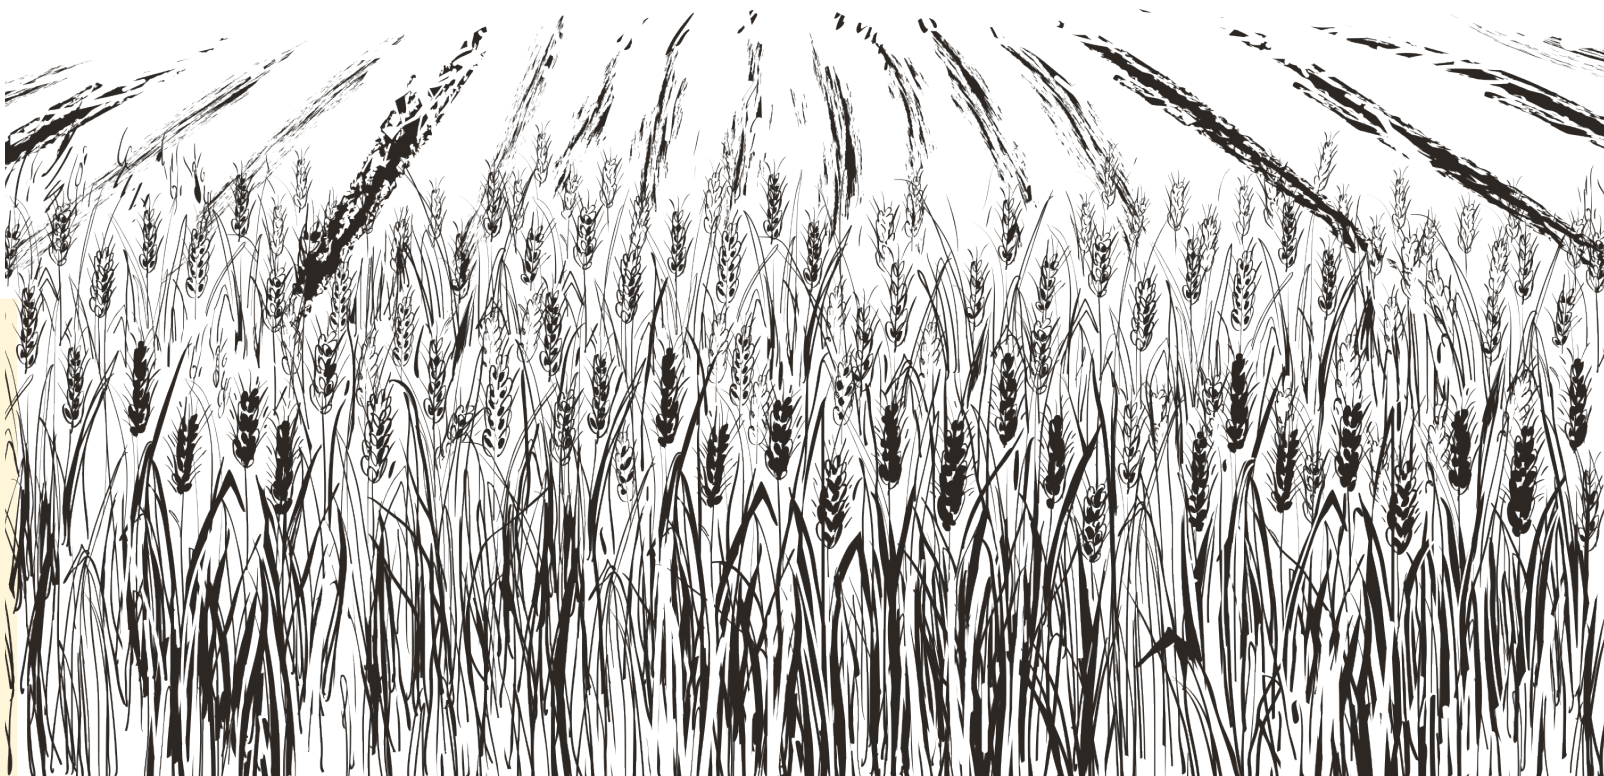





---

# *SIEGER*

[www.siegertech.de](http://www.siegertech.de)